


HB150
2F110

150 PSI HOT AIR BLOWER HOSE
ISO 9001 MFG



AIR HOSE

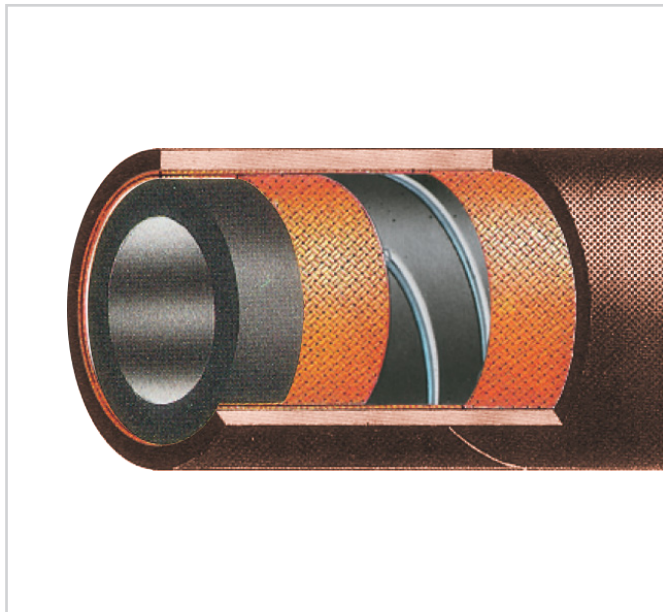

APPLICATION

TUBE

Black high grade heat resistant EPDM

COVER

Brown abrasion, ozone and weather resistant EPDM

REINFORCEMENT

High tensile textile cord with dual helix wires

BRANDING

Yellow longitudinal stripe: 150 PSI Hot Air

SAFETY FACTOR

3:1

TEMPERATURE

-40 °F to 392 °F

Designed for transfer of hot and dry air from compressor to tank truck. Reduced bend radius for added flexibility.

NEW PART NO.	LEGACY PART NO.	I.D. (IN)	O.D.* (IN)	WORKING PRESSURE (PSI)	WEIGHT FT/LB	MBR (IN)	STANDARD LENGTH/FT
HB150-300	2F110-300	3	3.55	150	1.9	9.84	100/200
HB150-400	2F110-400	4	4.56	150	2.47	18.11	100/200

PLEASE INQUIRE REGARDING ACCEPTABLE FITTINGS. ASSEMBLY FABRICATION AND TESTING AVAILABLE.
COUPLINGS: CAM & GROOVE, PIN PLUG OR COMBINATION NIPPLES.
ASSEMBLY, FABRICATION AND TESTING AVAILABLE.