


CH150
2F603

150 PSI - UHMWPE CHEMICAL HOSE
ISO 9001 MFG

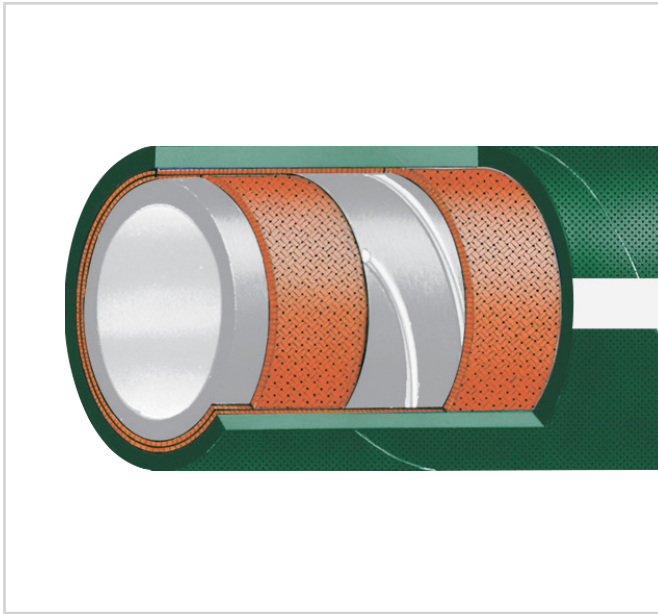

APPLICATION

TUBE

Smooth translucent, food grade, UHMWPE

COVER

Green abrasion, ozone and weather resistant EPDM

REINFORCEMENT

High tensile synthetic textile cord and helical steel wire

BRANDING

Yellow layline: 150 PSI UHMWPE Chemical

ELECTRIC CONTINUITY

Anti-static copper wire

SAFETY FACTOR

4:1

TEMPERATURE

-40 °F to 176 °F (temperature range varies with product being conveyed, check with customer service)

Designed for suction and discharge service for a wide variety of chemicals and solvents.
PLEASE CHECK CHEMICAL RESISTANCE CHART OR CALL CUSTOMER SERVICE.

NEW PART NO.	LEGACY PART NO.	I.D. (IN)	O.D.* (IN)	WORKING PRESSURE (PSI)	WEIGHT FT/LB	MBR (IN)	STANDARD LENGTH/FT
CH150-.75	2F603-.75	3/4	1.22	150	0.46	3.15	100/200
CH150-100	2F603-100	1	1.46	150	0.55	4.33	100/200
CH150-125	2F603-125	1-1/4	1.77	150	0.75	6.5	100/200
CH150-150	2F603-150	1-1/2	2.05	150	1	8.86	100/200
CH150-200	2F603-200	2	2.64	150	1.53	13.78	100/200
CH150-250	2F603-250	2-1/2	3.15	150	1.87	17.72	100/200
CH150-300	2F603-300	3	3.66	150	2.23	31.5	100/200
CH150-400	2F603-400	4	4.72	150	3.28	47.24	100/200

COUPLINGS: STAINLESS STEEL OR POLYPROPYLENE CAM & GROOVE OR STAINLESS STEEL COMBINATION NIPPLES. ASSEMBLY FABRICATION AND TESTING AVAILABLE. WHEN ORDERING PLEASE SPECIFY WORKING CONDITIONS SUCH AS CHARACTERISTICS OF FLUID, CONCENTRATION AND WORKING TEMPERATURE.