


MS150
2F542

150 PSI HEAVY DUTY DRY MATERIAL SUCTION/DISCHARGE HOSE
ISO 9001 MFG

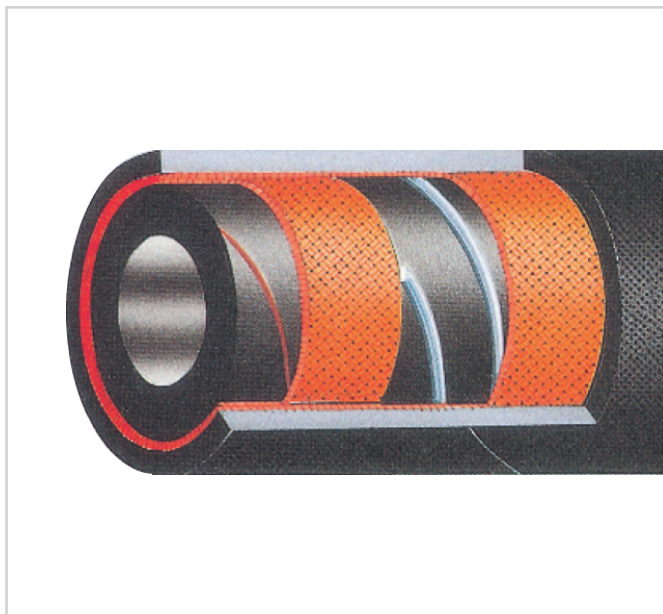

APPLICATION

TUBE

1/4" black anti-static and abrasion resistant natural rubber

COVER

Black abrasion, ozone and weather resistant SBR

REINFORCEMENT

High tensile synthetic textile cord and steel helical wire

BRANDING

Yellow longitudinal stripe: 150 PSI Dry Material Suction/Discharge

ELECTRIC CONTINUITY

Anti-static copper wire

SAFETY FACTOR

3:1

TEMPERATURE

-40 °F to 158 °F

MATERIAL HANDLING

Designed for suction and discharge of sand, gravel, dry cement and other abrasive materials.

NEW PART NO.	LEGACY PART NO.	I.D. (IN)	O.D.* (IN)	WORKING PRESSURE (PSI)	WEIGHT FT/LB	MBR (IN)	STANDARD LENGTH/FT
MS150-400	2F542-400	4	4.72	150	3.06	18.9	100/200
MS150-500	2F542-500	5	5.86	150	4.5	24.6	100/200
MS150-600	2F542-600	6	6.87	150	5.92	30.7	100/200

COUPLINGS: CAM & GROOVE PINPLUGS OR COMBINATION NIPPLES. ASSEMBLY FABRICATION AND TESTING AVAILABLE.