


DC225
2F600

225 PSI DOCK OIL SUCTION & DISCHARGE HOSE
ISO 9001 MFG

A

PETROLEUM HOSE

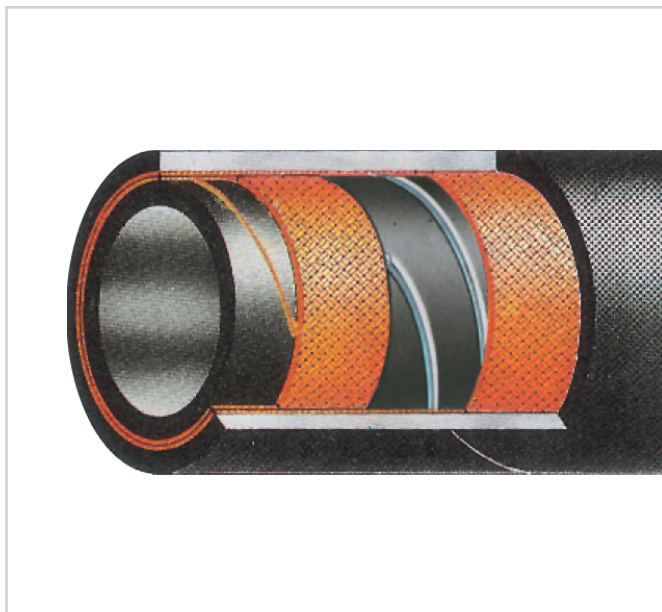

APPLICATION

TUBE

Black nitrile oil and petroleum resistant

COVER

Black oil, weather and abrasion and sea water resistant neoprene

REINFORCEMENT

High tensile synthetic textile cord with dual steel helical wires

BRANDING

Red longitudinal stripe: 225 PSI Dock Suction/ Discharge

SAFETY FACTOR

4:1

TEMPERATURE

-22 °F to 212 °F

Suction and discharge of petroleum products with aromatic content up to 50%.

NEW PART NO.	LEGACY PART NO.	I.D. (IN)	O.D.* (IN)	PLIES	WORKING PRESSURE (PSI)	WEIGHT FT/LB	MBR (IN)	STANDARD LENGTH/FT
DC225-300	2F600-300	3	4	4	225	3.17	12	100
DC225-400	2F600-400	4	5	4	225	4.08	24	100
DC225-600	2F600-600	6	7.25	6	225	7.87	36	100
DC225-800	2F600-800	8	9.25	6	225	10.84	48	100
DC225-1000	2F600-1000	10	11.67	6	225	19.92	60	20, 25, 30
DC225-1200	2F600-1200	12	13.84	6	225	23.9	72	20, 25, 30

OTHER SIZES AVAILABLE. COUPLINGS: SWAGED FIXED OR FLOATING FLANGES (150 LB CARBON STEEL) OR MNPT. BUILT-IN NIPPLE AND FLANGE AVAILABLE (SPECIAL ORDER). STAMPED I.D. NUMBER ON FERRULES. TESTING AVAILABLE.