


LM250
1C11M

250 PSI LIQUID MUD HOSE
ISO 9001 MFG

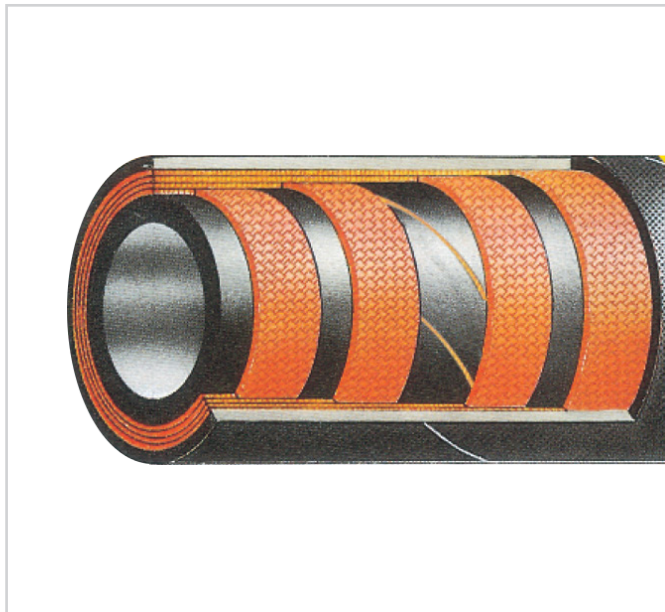

APPLICATION

TUBE

Black oil resistant synthetic rubber

COVER

Black abrasion and oil resistant synthetic rubber

REINFORCEMENT

High tensile synthetic textile cord

BRANDING

Red longitudinal stripe: 250 PSI Liquid Mud

SAFETY FACTOR

3:1

TEMPERATURE

-40 °F to 180 °F

A

PETROLEUM HOSE

A rugged discharge hose used for the conveying of liquid mud and slurries to barges, supply ships and oil rigs.

NEW PART NO.	LEGACY PART NO.	I.D. (IN)	O.D.* (IN)	PLIES	WORKING PRESSURE (PSI)	WEIGHT FT/LB	MBR (IN)	STANDARD LENGTH/FT
LM250-400	1C11M-400	4	4.74	4	250	3.12	N/A	100/200
LM250-500	1C11M-500	5	5.78	4	250	4.1	N/A	100/200

COUPLINGS: CAM & GROOVE OR COMBINATION NIPPLE. ASSEMBLY FABRICATION & TESTING AVAILABLE.