


**LM300**  
1C15

**300 PSI HEAVY DUTY LIQUID MUD HOSE**  
ISO 9001 MFG

**A**

PETROLEUM HOSE

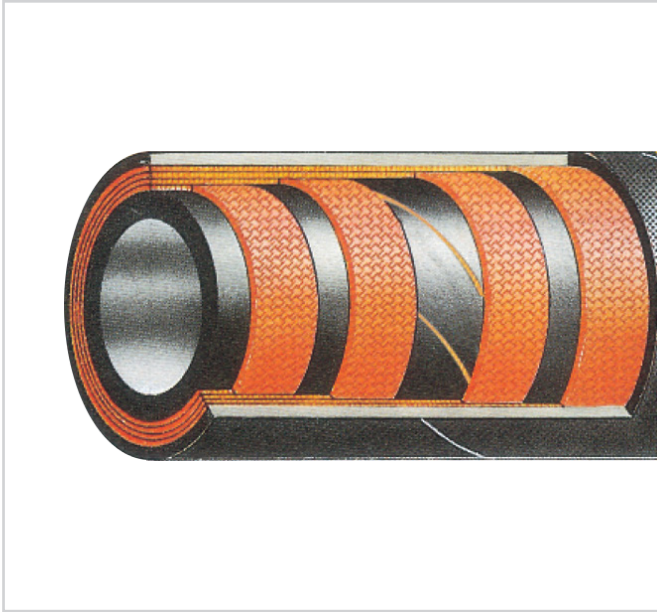

**APPLICATION**

**TUBE**

Black oil resistant synthetic rubber hose

**COVER**

Black abrasion and oil resistant synthetic rubber

**REINFORCEMENT**

High tensile synthetic textile cord

**BRANDING**

Blue longitudinal stripe: 300 PSI HD  
Liquid Mud

**SAFETY FACTOR**

3:1

**TEMPERATURE**

-40 °F to 180 °F

Durable and flexible construction, designed for long service life in discharge applications of liquid mud, slurries and other petroleum based products (ideal for use between docks and barges).

NEW PART NO.	LEGACY PART NO.	I.D. (IN)	O.D.* (IN)	PLIES	WORKING PRESSURE (PSI)	WEIGHT FT/LB	MBR (IN)	STANDARD LENGTH/FT
LM300-300	1C15-300	3	3.65	4	300	2.55	N/A	100/200
LM300-400	1C15-400	4	4.88	4	300	3.4	N/A	100/200

**COUPLINGS:** CAM & GROOVE OR COMBINATION NIPPLE. ASSEMBLY FABRICATION & TESTING AVAILABLE.