


**OS150**  
2F621

**150 PSI OILFIELD SUCTION HOSE**  
ISO 9001 MFG

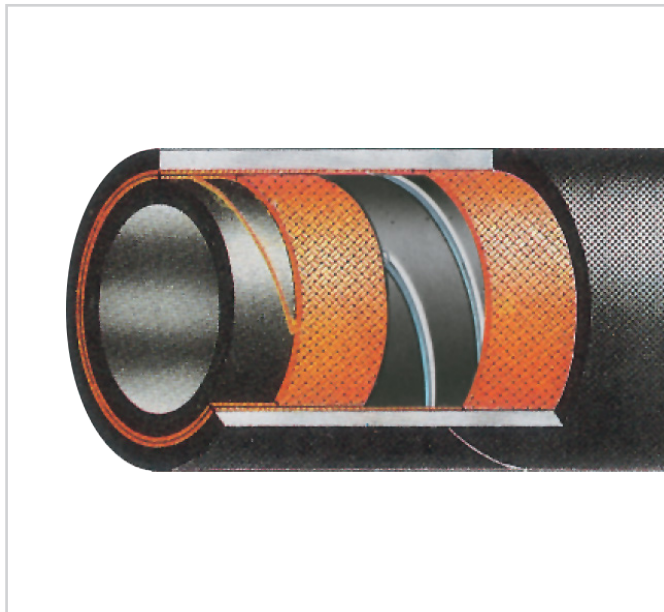

**APPLICATION**

**TUBE**

Black oil and petroleum resistant NBR

**COVER**

Black oil, weather, ozone and abrasion resistant neoprene

**REINFORCEMENT**

High tensile synthetic textile cord with a steel helical wire

**BRANDING**

Blue longitudinal stripe: 150 PSI Oilfield Suction/Discharge

**ELECTRIC CONTINUITY**

\*INQUIRE FOR DETAILS

**SAFETY FACTOR**

3:1

**TEMPERATURE**


-40 °F to 180 °F

**A**

PETROLEUM HOSE

Designed for oilfield vacuum truck service for suction and discharge of petroleum product with aromatic content up to 50%. THIS PRODUCT IS NOT RECOMMENDED FOR REFINED PETROLEUM PRODUCTS.

NEW PART NO.	LEGACY PART NO.	I.D. (IN)	O.D.* (IN)	PLIES	WORKING PRESSURE (PSI)	WEIGHT FT/LB	MBR (IN)	STANDARD LENGTH/FT
OS150-150	2F621-150	1-1/2	2.05	2	150	.82	4.5	100/200
OS150-200	2F621-200	2	2.56	2	150	1.19	7	100/200
OS150-300	2F621-300	3	3.54	2	150	2	9	100/200
OS150-400	2F621-400	4	4.65	2	150	2.75	16	100/200
OS150-600	2F621-600	6	6.75	2	150	5.2	26.75	100/200



**COUPLINGS:** CAM & GROOVE OR COMBINATION NIPPLE. ASSEMBLY FABRICATION & TESTING AVAILABLE.