


TT150
2F602

150 PSI TANK TRUCK HOSE
ISO 9001 MFG

A

PETROLEUM HOSE

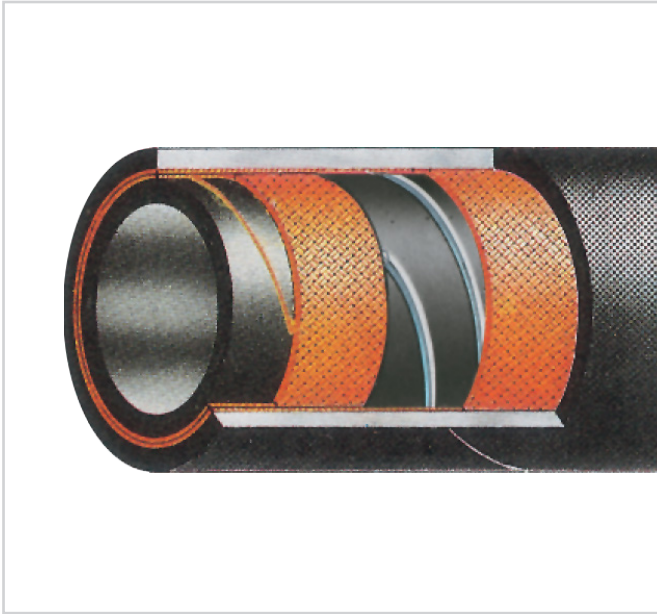

APPLICATION

TUBE

Black nitrile oil and petroleum resistant

COVER

Black CR abrasion, ozone and hydrocarbon resistant

REINFORCEMENT

High tensile synthetic textile cord and 2 helical antistatic copper wires

BRANDING

Red longitudinal stripe: 150 PSI Tank Truck

SAFETY FACTOR

3:1

TEMPERATURE

-5 °F to 180 °F

Suction and discharge of diesel fuel, oil and other petroleum based products with aromatic content up to 50%.

NEW PART NO.	LEGACY PART NO.	I.D. (IN)	O.D.* (IN)	WORKING PRESSURE (PSI)	WEIGHT FT/LB	MBR (IN)	STANDARD LENGTH/FT
TT150-150	2F602-150	1-1/2	1.97	150	0.98	8	100/200
TT150-200	2F602-200	2	2.5	150	1.22	10	100/200
TT150-250	2F602-250	2-1/2	3.03	150	1.7	15	100/200
TT150-300	2F602-300	3	3.5	150	2.03	20	100/200
TT150-350	2F602-350	3-1/2	4.2	150	2.75	25	100/200
TT150-400	2F602-400	4	4.69	150	3.42	30	100/200
TT150-450	2F602-450	4-1/2	5.3	150	3.98	33	100/200
TT150-500	2F602-500	5	5.75	150	4.28	36	100/200
TT150-600	2F602-600	6	6.85	150	7.22	40	100/200
TT150-800	2F602-800	8	8.98	150	8.73	64	100/200

COUPLINGS: CAM & GROOVE OR COMBINATION NIPPLE. ASSEMBLY FABRICATION & TESTING AVAILABLE.