


TT300
2F609

300 PSI HEAVY DUTY TANK TRUCK HOSE
ISO 9001 MFG

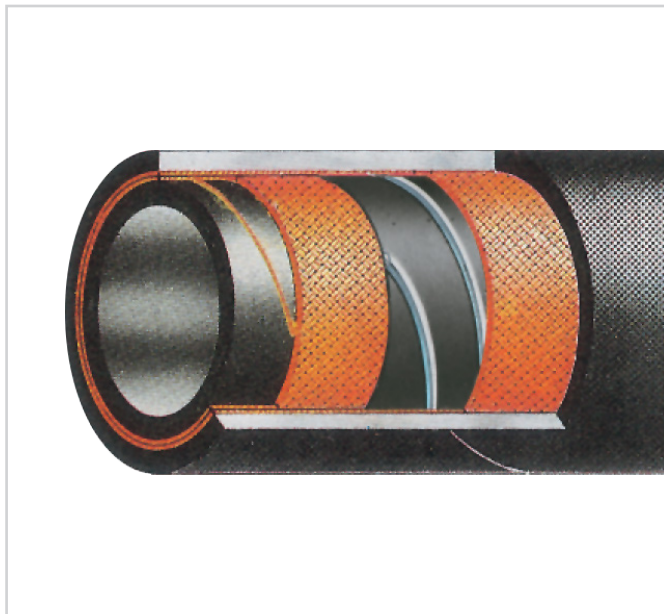

APPLICATION

TUBE

Black conductive NBR

COVER

Black CR abrasion, ozone and hydrocarbon resistant

REINFORCEMENT

High tensile textile cords with embedded steel helical anti-static wire

BRANDING

Red longitudinal stripe: 300 PSI Tank Truck

SAFETY FACTOR

3:1

TEMPERATURE

-22 °F to 176 °F (-30 °C to 80 °C)

A

PETROLEUM HOSE

Designed for long service life in heavy duty applications in delivery of petroleum products with aromatic content up to 50%.

NEW PART NO.	LEGACY PART NO.	I.D. (IN)	O.D.* (IN)	WORKING PRESSURE (PSI)	WEIGHT FT/LB	MBR (IN)	STANDARD LENGTH/FT
TT300-200	2F609-200	2	2.48	300	1.1	8	100/200
TT300-250	2F609-250	2 1/2	3.03	300	1.46	10	100/200
TT300-300	2F609-300	3	3.54	300	1.78	12	100/200
TT300-400	2F609-400	4	4.57	300	2.42	16	100/200
TT300-500	2F609-500	5	5.71	300	4.1	20	100/200
TT300-600	2F609-600	6	6.69	300	6	24	100/200
TT300-800	2F609-800	8	8.86	300	9	32	100

COUPLINGS: CAM & GROOVE OR COMBINATION NIPPLE. ASSEMBLY FABRICATION & TESTING AVAILABLE.