


WD075
1C24

75 PSI WATER DISCHARGE HOSE
ISO 9001 MFG

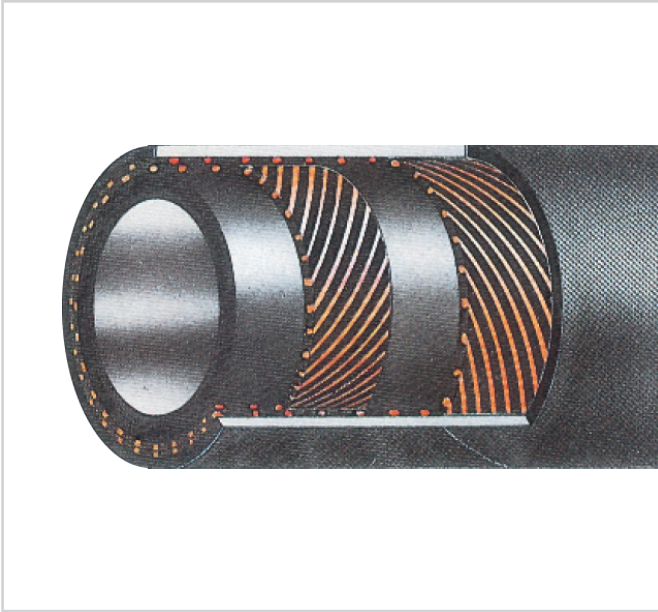

APPLICATION

TUBE

Black SBR

COVER

Black abrasion, weather and ozone resistant SBR/EPDM blend

REINFORCEMENT

High tensile synthetic textile cord

BRANDING

Green Longitudinal Stripe: 75 PSI Water Discharge

SAFETY FACTOR

3:1

TEMPERATURE

-15 °F to 158 °F

B

WATER HOSE

Layflat water discharge service for industrial and agricultural applications.

NEW PART NO.	LEGACY PART NO.	I.D. (IN)	O.D.* (IN)	PLIES	WORKING PRESSURE (PSI)	WEIGHT FT/LB	STANDARD LENGTH/FT
WD075-150	1C24-150	1 1/2	1.73	2	75	0.26	100/200
WD075-200	1C24-200	2	2.24	2	75	0.34	100/200
WD075-250	1C24-250	2 1/2	2.76	2	75	0.49	100/200
WD075-300	1C24-300	3	3.23	2	75	0.59	100/200
WD075-400	1C24-400	4	4.29	2	75	0.84	100/200
WD075-600	1C24-600	6	6.45	2	75	1.2	100/200
WD075-800	1C24-800	8	8.45	2	75	2.07	100/200
WD075-1000	1C24-1000	10	10.48	2	75	4.03	100/200

COUPLINGS: CAM & GROOVE OR COMBINATION NIPPLE. ASSEMBLY FABRICATION & TESTING AVAILABLE.