


WD150
1C22

150 PSI WATER DISCHARGE HOSE
ISO 9001 MFG

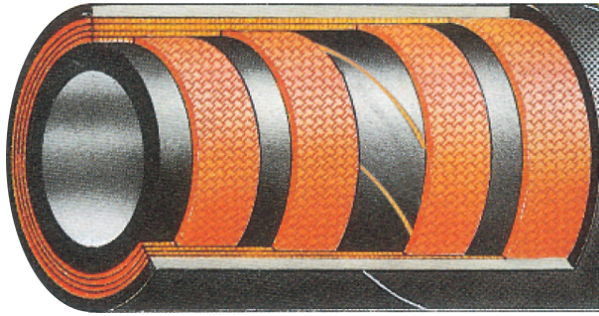

APPLICATION

TUBE

Black EPDM blend

COVER

Black abrasion, weather and ozone resistant SBR/EPDM blend

REINFORCEMENT

High tensile synthetic textile cord

BRANDING

Green spiral stripe: 150 PSI Water Discharge

SAFETY FACTOR

3:1

TEMPERATURE

-15 °F to 158 °F

Layflat discharge service for water and slurries in construction, farming and oilfield.

NEW PART NO.	LEGACY PART NO.	I.D. (IN)	O.D.* (IN)	PLIES	WORKING PRESSURE (PSI)	WEIGHT FT/LB	STANDARD LENGTH/FT
WD150-125	1C22-125	1-1/4	1.7	2	150	0.55	100
WD150-150	1C22-150	1-1/2	2.05	4	150	0.83	100
WD150-200	1C22-200	2	2.56	4	150	1.25	100
WD150-250	1C22-250	2-1/2	3.08	4	150	1.67	100
WD150-300	1C22-300	3	3.59	4	150	1.96	100
WD150-350	1C22-350	3-1/2	4.14	4	150	2.3	100
WD150-400	1C22-400	4	4.65	4	150	2.74	100
WD150-450	1C22-450	4-1/2	5.12	4	150	2.92	100
WD150-500	1C22-500	5	5.6	4	150	3.08	100
WD150-600	1C22-600	6	6.6	4	150	4.75	100
WD150-800	1C22-800	8	8.6	4	150	4.75	100
WD150-1000	1C22-1000	10	10.6	4	150	5.25	100
WD150-1200	1C22-1200	12	12.576	4	150	6.53	100

COUPLINGS: CAM & GROOVE PINPLUGS OR COMBINATION NIPPLES. ASSEMBLY FABRICATION AND TESTING AVAILABLE. 16", 20" & 24" I.D. AVAILABLE UPON REQUEST, MAXIMUM LENGTHS 50 FT.