


WJ600
1C29

600 PSI WATER JETTING HOSE
ISO 9001 MFG

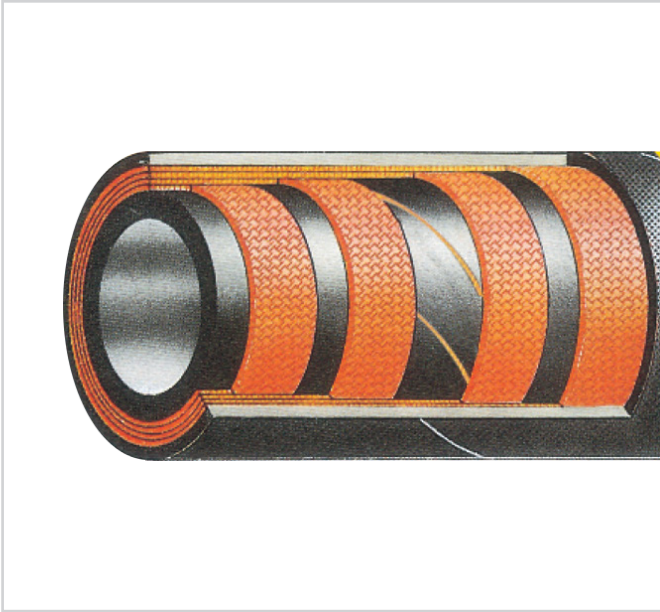

APPLICATION

TUBE

Black EPDM/SBR

COVER

Black abrasion, ozone and weather resistant EPDM/SBR blend

REINFORCEMENT

4 ply high tensile synthetic textile cord

BRANDING

White spiral stripe: 600 PSI Water Jetting

SAFETY FACTOR

4:1

TEMPERATURE

-30 °F to 180 °F

B

WATER HOSE

Designed for heavy duty, high pressure water jetting. Excellent resistance to common wear associated with water jetting in the marine and construction industries.

NEW PART NO.	LEGACY PART NO.	I.D. (IN)	O.D.* (IN)	PLIES	WORKING PRESSURE (PSI)	WEIGHT FT/LB	STANDARD LENGTH/FT
WJ600-250	1C29-250	2	2.7	4	600	1.3	100
WJ600-300	1C29-300	2-1/2	3.24	4	600	1.59	100
WJ600-400	1C29-400	4	4.74	4	600	2.42	100
WJ600-600	1C29-600	6	7.21	4	600	6.9	100
WJ600-800*	1C29-800	8	10.15	4	600	10.15	100

COUPLINGS: INTERNAL EXPANDING OR EXTERNAL SWAGE MNPT OR FLANGES. ASSEMBLY FABRICATION AND TESTING AVAILABLE.

8" SIZE AVAILABLE UPON REQUEST ONLY.