


WS150
2F101

150 PSI WATER SUCTION HOSE
ISO 9001 MFG

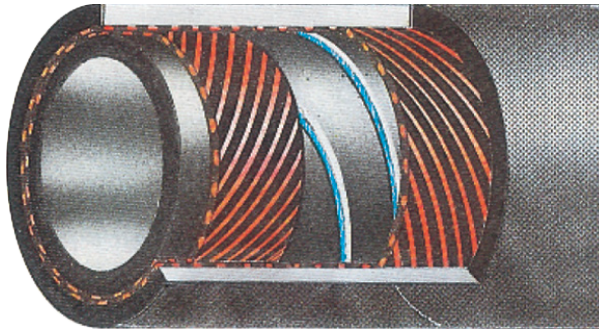

APPLICATION

TUBE

Black EPDM blend

COVER

Black abrasion and weather resistant EPDM blend

REINFORCEMENT

High tensile synthetic textile cord with helical steel wire

BRANDING

White Longitudinal Stripe: 150 PSI Water Suction/Discharge

SAFETY FACTOR

3:1

TEMPERATURE

-15 °F to 180 °F

Water suction in mining, construction and agriculture, where a durable hose is required.

NEW PART NO.	LEGACY PART NO.	I.D. (IN)	O.D.* (IN)	WORKING PRESSURE (PSI)	WEIGHT FT/LB	MBR (IN)	STANDARD LENGTH/FT
WS150-100	2F101-100	1	1.33	150	0.43	3.54	100/200
WS150-125	2F101-125	1-1/4	1.65	150	0.61	4.33	100/200
WS150-150	2F101-150	1-1/2	1.89	150	0.8	5.31	100/200
WS150-200	2F101-200	2	2.44	150	1.17	7.9	100/200
WS150-250	2F101-250	2-1/2	3	150	1.5	10.6	100/200
WS150-300	2F101-300	3	3.5	150	1.9	13.4	100/200
WS150-350	2F101-350	3-1/2	4.14	150	*	20	100/200
WS150-400	2F101-400	4	4.52	150	2.64	17.7	100/200
WS150-450	2F101-450	4-1/2	5.3	150	*	26	100/200
WS150-500	2F101-500	5	5.59	150	4.77	25.6	100/200
WS150-600	2F101-600	6	6.61	150	5	27.5	100/200
WS150-800	2F101-800	8	8.85	150	9	43	20, 25, 30
WS150-1000	2F101-1000	10	11	150	12	59	20, 25, 30
WS150-1200	2F101-1200	12	12.95	150	13.78	75	20, 25, 30

COUPLINGS: CAM & GROOVE OR COMBINATION NIPPLE. ASSEMBLY FABRICATION & TESTING AVAILABLE.

*PLEASE CALL CUSTOMER SERVICE FOR WEIGHT DETAILS.